

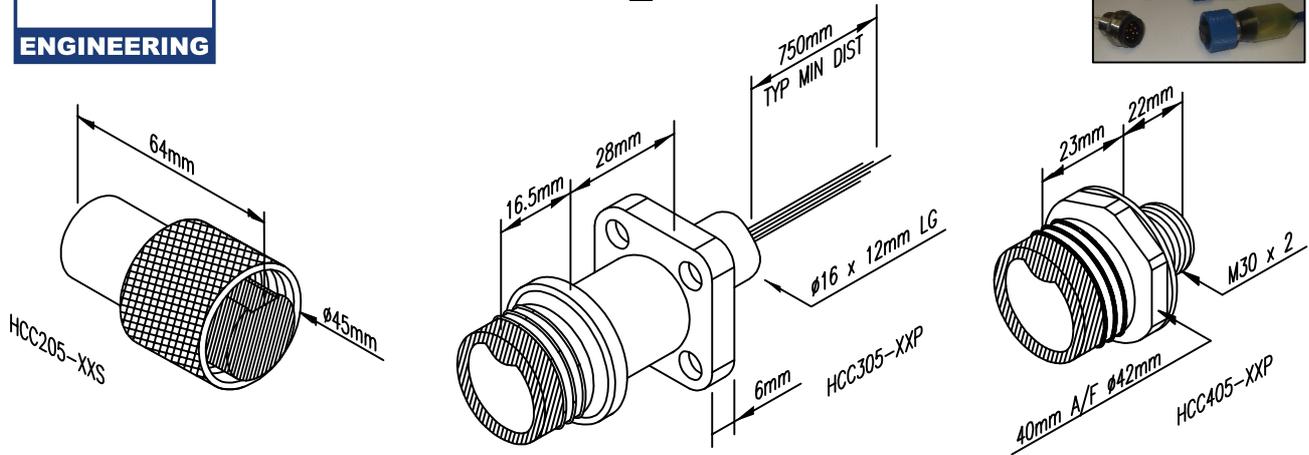



HCC Surface Mateable Connector HCC_05-XX



FACE VIEW
HCC205-06S

Electrical and Environmental:


Pin/Socket Max Current Rating: 8 Amps
Pin/Socket Test Voltage: 2,000 V rms
Working Voltage: 1000 Volts D.C.
Solder Bucket Size: 2.5 mm dia



FACE VIEW
HCC205-08S

Electrical and Environmental:

Pin/Socket Max Current Rating: 6 Amps
Pin/Socket Test Voltage: 2,000 V rms
Working Voltage: 1000 Volts D.C.
Solder Bucket Size: 2.5 mm dia



FACE VIEW
HCC205-12S

Electrical and Environmental:

Pin/Socket Max Current Rating: 5 Amps
Pin/Socket Test Voltage: 2,000 V rms
Working Voltage: 1000 Volts D.C.
Solder Bucket Size: 2.5 mm dia

Standard Specification:

Mated Depth Rating: 2,440 MSW
Temperature Rating: -20 °C to +60 °C
Contact to Contact I.R. > 1G Ω @ 1kv
Contact to Body I.R. > 1G Ω @ 1kv

Body: BS 316L - Stainless Steel
Fix Ring: Acetal
Contact Sockets: Brass
Contact Pins: Brass
O-Ring: NI70